



RESOLUTION

RELATING TO THE ACCEPTANCE OF A GIFT TO THE CITY FROM THE PALEHUA
COMMUNITY ASSOCIATION

WHEREAS, Section 13-113 of the Revised Charter of the City and County of Honolulu provides for the acceptance of gifts to the City by the Council of the City and County of Honolulu; and

WHEREAS, Resolution No. 05-349, CD1, FD1, establishes a policy of the Council for the solicitation and acceptance of gifts donated to the City executive agencies; and

WHEREAS, the policy provides for acceptance of the gift by affirmative action by the Council; and

WHEREAS, through a letter, the Director of the Department of Parks and Recreation, has submitted a request for acceptance of a gift to the Council and approved by the Managing Director of a gift valued at \$4,192.59 for a security camera system, equipment and installation from the Palehua Community Association for Palailai Neighborhood Park; and,

WHEREAS, the description and value of the gift is set forth in the Declaration of Gift (Exhibit A), attached hereto and incorporated herein; now, therefore,

WHEREAS, information about the proposal/estimate of a security camera system, equipment and installation is attached hereto as (Exhibit B) and by reference made a part of this resolution; now, therefore,

BE IT RESOLVED by the Council of the City and County of Honolulu that this body accept the gift valued at \$4,192.59 from the Palehua Community Association that is more fully described in the above-mentioned letter from the Director of the Department of Parks and Recreation; and

DPR2011.PALEHUACOMMASSOCIATION-PALAILAI.R11

City and County of Honolulu

DECLARATION OF GIFT

NAME OF DONOR	<i>Palehua Community Assoc.</i>
DONOR'S ADDRESS	<i>579 Foreman's Hwy Ste 206 Kapele'i Keolu HI 96707</i>
DONOR'S TELEPHONE	<i>674-1066</i>

STATEMENT OF OWNERSHIP AND/OR TERMS OF CONVEYANCE

I own the item described below and desire to give the property to the City and County of Honolulu. To Carry out my purpose, I do hereby absolutely and without condition or reservation give, grant and convey the property to the City and County of Honolulu.

DESCRIPTION OF GIFT	VALUE
<p>Complete and accurate description of gift in detail. Enclose a photo if available.</p> <p><i>Security Camera System please see attached proposal & equipment list. for Mahalo Palairai Park, on Palahua St.</i></p>	<p>Actual or Estimated</p> <p><i>4,192⁵⁷</i></p>

Signature: <i>[Signature]</i>	Date: <i>12/4/09</i>
Print Name: <i>Jeff Sampson</i>	Title: <i>Vice President</i>

LINDSEY WHELAN PRESIDENT PCA BAD
[Signature]



Date: 10/2/09

Makakilo Palailai Park
Palahia Street
Makakilo, Hawaii 96707

System: **Security Camera System**

Contact: Jeff Sampson

Phone: 489-5252
Work:

SCOPE OF THE PROJECT:

Install new Security Camera System at Makakilo Palailai Park.

1. Install 1 new Digital Video Recorder for recording 4 cameras and storing 500 Gigabytes of video images on built-in hard drive. The oldest day will be over written when the hard drive has been full, thus preserving the last 1-2 weeks of video activity. Digital Video Recorder is "Internet Ready" with jacks for plugging into DSL or Oceanic high speed modem.
2. Install 4 Indoor High Resolution Infrared Dome Color Cameras, 550 TV Lines, Vandal / Weather Resistant, Auto-iris adjust to light automatically, Varifocal 2.9 mm - 10 mm lens and 100' Infrared veiwing..
3. Install new 14" Color Flat Screen Monitor.

Price includes equipment, labor, client training and "One Year Parts and Labor Warranty"

INSTALLATION NOTES

Contact Jeff Sampson for installation instructions.

EQUIPMENT DESCRIPTION	MANUFACTURER	PART NUMBER	QTY	UNIT	TOTAL
Digital Video Recorder - 4 camera capacity, 500 gigabytes of recording memory, UPS / Power Surge Protection.	Vitek	VT-E4/500	1	721.00	721.00
High Resolution Color Dome Camera, Outdoor, 550 TV Lines, Vandal / Weather Resistant, Auto iris adjust to light automatically, and Varifocal 2.9 mm - 10 mm lens and Infrared.	Vitek	VTD-MVX2910/L35	4	356.00	1,424.00
14" Color Flat Screen Monitor	Vitek	VTM-LCD143	1	329.00	329.00
4 Camera Power Supply	Stealth	YY-PS2440SB	1	195.00	195.00
Electrical Conduit, Wire, Miscellaneous Parts				255.00	255.00
Installation Labor, System Testing, Client Training				1,080.00	1,080.00
One Year Parts and Labor Warranty				Sub Total	4,004.00
Estimate valid for 60 days				Sales Tax	188.59
Shipping charges will be invoiced separately				GRAND TOTAL	\$4,192.59

Estimator: Dennis M. Manago
Contractor's License C-20140

Signature:

Date:

12/4/09

dennis@securitysystemshawaii.com

Office 521-0092

Cell 753-1106

Fax 591-0867

Products

- [Monitors](#)
- [Cameras](#)
- [PTZ Cameras & Controls](#)
- [Digital Recorders](#)
- [IP Integration](#)
- [Infrared Illuminators](#)
- [Video Signal Devices](#)
- [Packages](#)
- [Mounts & Housings](#)
- [Lenses](#)
- [Monitor Mounts & Rack Kits](#)
- [Power Supplies & Connectors](#)

Digital Recorders > E Series > VT-E4

VT-E4

E-Series 4 Channel Digital Video Recorder



- 4 Looping Video Inputs with 1 Spot Monitor Output
- Remote Viewing over the Internet or LAN
- Supports both Dynamic and Static IP Addresses
- Up to 120 IPS Recording
- MPEG-4 Compression
- 4 Channel audio
- 4 Alarm Inputs / 1 Relay Out (1 Relay)
- Available with 250GB or 500GB HDD Storage
- Supports two internal Hard Drives
- Control locally via Front Panel, USB Mouse or with the Included IR Remote Control
- PTZ Control over RS-485
- Backup via ethernet or USB
- Built-In Bandwidth Throttling

[Spec Sheet](#) [Manual](#) [Hi-Res Image](#) [Email a Friend](#)

VT-E4 Specifications:

Video Standard	NTSC & PAL
Video inputs	4
Looping Outputs	4
Monitor Output	Composite / S-VHS 704 x 480 / 704 x 576
Main Monitor Output	VGA/Composite/S-VHS
Spot Output (Analog)	1
Split Screen	1 / 4
Audio	4 In / 1 Out
Alarm	4 In / 1 Out (1 Relay)
Recording Speed	CIF (360 X 240), Half-D1 (720 X 240), D1 (720 X 480)
Compression	MPEG-4 (Modified)
Average File Size	CIF: 2~4k Half-D1: 4~6k D1: 8~12k
Internal Storage	2 x HDD (Max)
Backup Options	External USB Devices (Flash Memory, HDD, CD/DVD±R, Etc.)
Backup File Format	AVI
Ethernet	RJ45 @ 10/100Mbps
Bandwidth Throttling	3 Levels
Dynamic IP support	Yes

PTZ Control	RS-485
USB	USB 2.0
Pre / Post Event Buffer	Up to: 5 Seconds Pre-Event / 5 Minutes Post-Event
Motion Area Setup	Adjustable 12 x 12 Grid
Operation Device	Front Panel / IR Remote Control / USB Mouse (Mouse Not Included)
IR Remote Control	Included
Power	100~240VAC, 1.0/1.5A, 60/50Hz
Operation Temp.	32° ~ 113° Fahrenheit
Humidity	0% ~ 80%
Dimensions (D x W x H)	14.2" x 15.5" x 2.5"
Weight	7.2lbs. (w/o HDD)

28492 Constellation Road Valencia, CA 91355 | Phone: 888-VITEK-70 / 661-294-8043 | Fax: 661-294-8044 | Sales@vitekccctv.com



Product Search

English | Español

Home

Products

Where to Buy

Support

Contact Us

About Us

Products

Monitors

Cameras

PTZ Cameras & Controls

Digital Recorders

IP Integration

Infrared Illuminators

Video Signal Devices

Packages

Mounts & Housings

Lenses

Monitor Mounts & Rack Kits

Power Supplies & Connectors

Monitors > LCD > VTM-LCD143



VTM-LCD143

14" Professional LCD Monitor w/ VGA & Looping BNC Composite Inputs

14" LCD Display Panel

VGA, S-Video, and Looping BNC Composite Inputs

Resolution up to 1024 x 768

Built-In Speakers

VESA 75mm Standard Mounting

[Spec Sheet](#) [Manual](#) [Hi-Res Image](#) [Email a Friend](#)

The Vitek VTM-LCD143 14" LCD Monitor offers an Economical, Space-Saving alternative to larger Composite Video LCD Monitors. This Professional LCD offers 1024 x 768 Resolution and Looping Composite Video In/Out. An easily removable Stand and VESA Mounting Capability provide convenience in Wall Mounting Applications.

VTM-LCD143 Specifications:

Panel Type	14" TFT Color LCD
Display Area	11.29" x 6.49" (285mm x 214mm)
Display Colors	16.7 Million
Recommended Resolution	1024 x 768 @ 75Hz
Contrast Ratio	300:1
Brightness	160 cd/m2
Viewing Angle	Hori: - 80 ~ + 85 / Vert: - 65 ~ +55
Response Time	25ms (Tr: 8 ms / Tf: 15 ms.)
PC Input	15 pin D-Sub (Analog RGB)
Video Inputs	S-Video, and Component
Power Consumption	Less than 24 Watts.
Screen Control	OSD (On Screen Display Menu)
Weight	5.20lbs (2.4Kg)
Power Input	AC 90 - 280 V, 50-60 Hz.
Dimensions	14.18" x 14.18" x 5.91" (360mm x 360mm x 150mm)

28492 Constellation Road, Valencia, CA 91355 | Phone: 888-VITEK-7676 | 661-254-8043 | Fax: 661-294-8044 | Sales@vitek.com



Product Search



English | Español

Home

Products

Where to Buy

Support

Contact Us

About Us

Products

Monitors

Cameras > Domes > IR Mighty Dome

Cameras

PTZ Cameras & Controls

Digital Recorders

IP Integration

Infrared Illuminators

Video Signal Devices

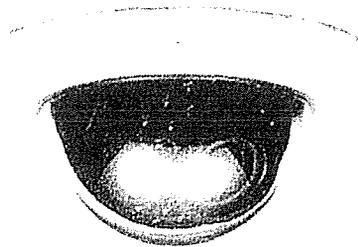
Packages

Mounts & Housings

Lenses

Monitor Mounts & Rack Kits

Power Supplies & Connectors



IR Mighty Dome

Vandal Proof Dome Camera Series with 35 IR LED Illumination

35 IR LED's with 90' Range

480 and 550 TV Line versions

Flush or Surface Mount

UTP interface, IP Integration, and Heater / Blower Options Available

Dual Voltage 12VDC & 24VAC

Infinity Ball Mount for Any Viewing Angle

Fully Gasketed IP68 Rated Weatherproof Design

Lens options include: 2.9-10mm & 9-22mm

Available in off white or black color

Available Configurations Include:

VTD-MVH2910/L35 / MVH922/L35: Vandal Proof Color Dome Camera w/2.9-10mm or 9-22mm Varifocal Lens, 480TVL & 35 IR LED's

VTD-MVX2910/L35 / MVX922/L35: Vandal Proof Color Dome Camera w/2.9-10mm or 9-22mm Varifocal Lens, 550TVL & 35 IR LED's

[Spec Sheet](#) [Manual](#) [Hi-Res Image](#) [Email a Friend](#)

IR Mighty Dome Specifications:

Image Sensor	1/3" Sony New Structure Super HAD CCD
Gamma	0.45
Sync System	Internal
Scanning system	2:1 Interlace
Lens Options	2.9-10mm / 9-22mm
Horizontal Resolution	480 TV Lines / 550 TV Lines
Min. Illumination	Day/Night: 0.02Lux (F1.2@40IRE) / Standard: 0.2Lux (F1.2@40IRE)
S/N Ratio	More than 50dB AGC OFF at 50IRE
Video Output	1.0Vp-p composite, 75 Ohms
Effective Pixels	768(H) x 494(V)
Electronic Shutter	1/60 ~ 1/100,000
White Balance	2000~6000 K Automatic Tracking
IR LEDs	35 LEDs with up to 90' Range
Weatherproof	IP68
Operating Temperature	14F ~ 122F (-10C ~ +50C)
Operating Humidity	Within 85% RH

Power Consumption	3 Watts (IR LEDs Off) / 6 Watts (IR LEDs On)
Power Requirement	12VDC/24VAC Dual Voltage (1000 mA Minimum)
Dimensions (H x Dia.)	4.45" x 5.71" (113mm x 145mm)

28492 Constellation Road Valencia, CA 91355 | Phone: 888-VITEK-70 / 661-294-8043 | Fax: 661-294-8044 | Sales@vitekcciv.com

CITY COUNCIL
CITY AND COUNTY OF HONOLULU
HONOLULU, HAWAII
C E R T I F I C A T E

RESOLUTION 12-28

Introduced: 01/24/12 By: ERNEST MARTIN (BR)

Committee: PARKS AND CULTURAL
AFFAIRS


Title: RESOLUTION RELATING TO THE ACCEPTANCE OF A GIFT TO THE CITY FROM THE PALEHUA
COMMUNITY ASSOCIATION.

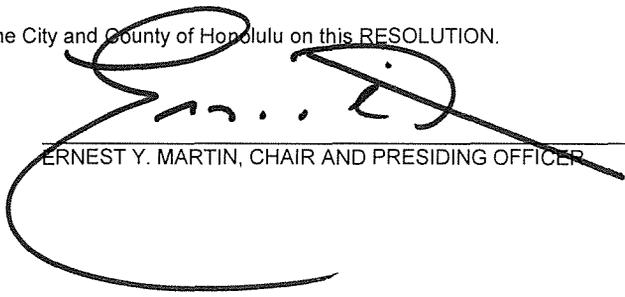
Links: [RES12-28](#)
[CR-215](#)

Voting Legend: Y= Aye, Y* = Aye w/Reservations, N = No, A = Absent, ABN = Abstain

PARKS AND CULTURAL AFFAIRS	02/07/12	RESOLUTION DEFERRED IN COMMITTEE.				
PARKS AND CULTURAL AFFAIRS	02/28/12	RESOLUTION DEFERRED IN COMMITTEE.				
PARKS AND CULTURAL AFFAIRS	06/26/12	CR-215 – RESOLUTION REPORTED OUT OF COMMITTEE FOR ADOPTION.				
COUNCIL	07/11/12	CR-215 AND RESOLUTION 12-28 WERE ADOPTED.				
ANDERSON A	BERG Y	CACHOLA A	CHANG Y	GABBARD Y		
GARCIA Y	HARIMOTO Y	KOBAYASHI Y	MARTIN Y			

I hereby certify that the above is a true record of action by the Council of the City and County of Honolulu on this RESOLUTION.


BERNICE K. N. MAU, CITY CLERK


ERNEST Y. MARTIN, CHAIR AND PRESIDING OFFICER